



Technical Drawing

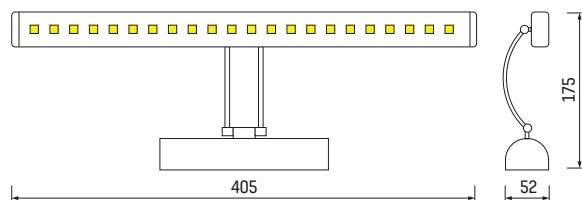


Photometric Diagram

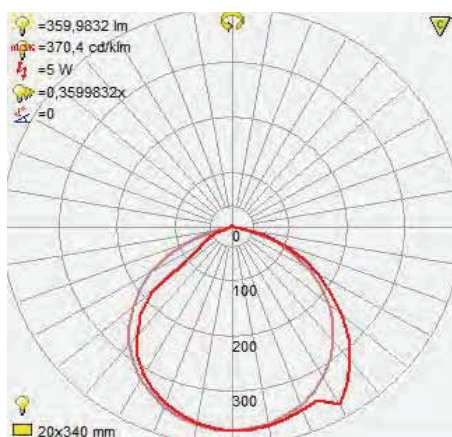

Technical Data	
Voltage (V)	100-250V
Product Wattage (W)	4
Equivalence with incandescent lamp(W)	32
Colour Render Index (Ra)	>Ra70
Colour Temperature (K)	4200
Materials	Metal + Chrome
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	360
Luminous Efficacy (lm/W)	90
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.8
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

- Bathroom, suitable for bedroom, hallway etc.

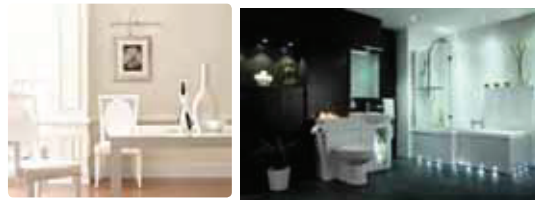

Features

- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- Very low energy consumption.

